

Components

- Rehabilitation of old landfill
- Construction of MBT plant
- Introduction of new SWM system

Financing

Phase I

- €20 million EBRD loan
- €5 million EBRD loan – Clean Technology Fund
- €10 million Grant of the Eastern Europe Energy Efficient Partnership Foundation
- €6,75 million from city budget

Phase II

- EIB loan

Phase I components


Components	€, mln.
Rehabilitation of Hrybovychi landfill: Phase 1	11,56
Installation of leachate treatment facilities at Hrybovychi landfill	1,8
Construction of waste mechanical and biological treatment facilities: Phase 1	23,5
Development of the household civic amenity centers	4,14
Locally co-financed capex (technical design, preparatory construction works for MBT)	1,75
Total	41,75

MBT Plant

Mechanical sorting


- Pre-sorting
- Screening
 - Separate finer fraction for composting
- Manual sorting on coarser fraction

- Baling of separated recyclables and residual

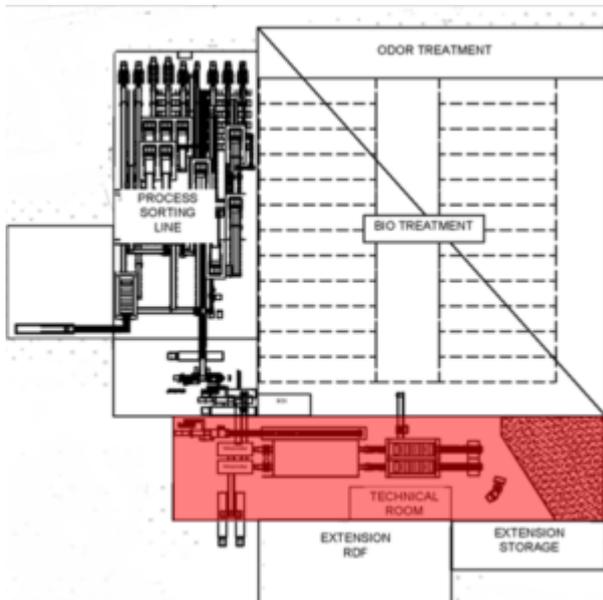


Composting

- Windrow (covered) or tunnel system
- Post-composting:
 - Removal of metals
 - Screening to separate fine fraction
 - Coarse fraction divided into inerts or RDF
- Air filtration system

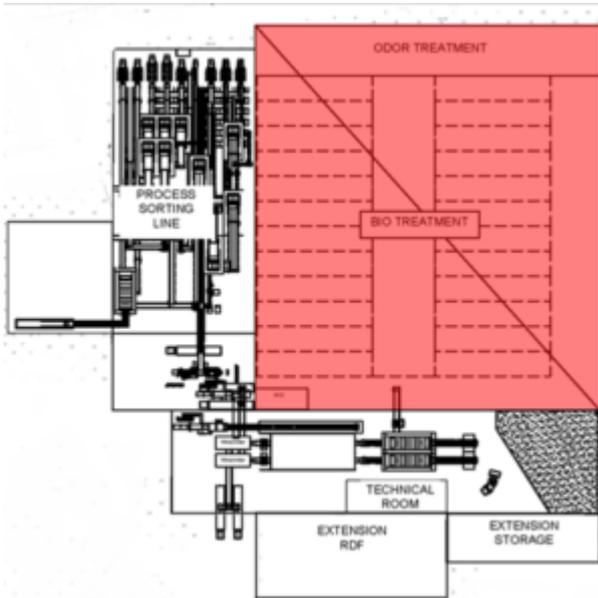

RDF production


- High quality RDF separated mechanically from light fraction of residual waste after hand-sorting and then shredded
- Low quality RDF from coarse fraction post-composting

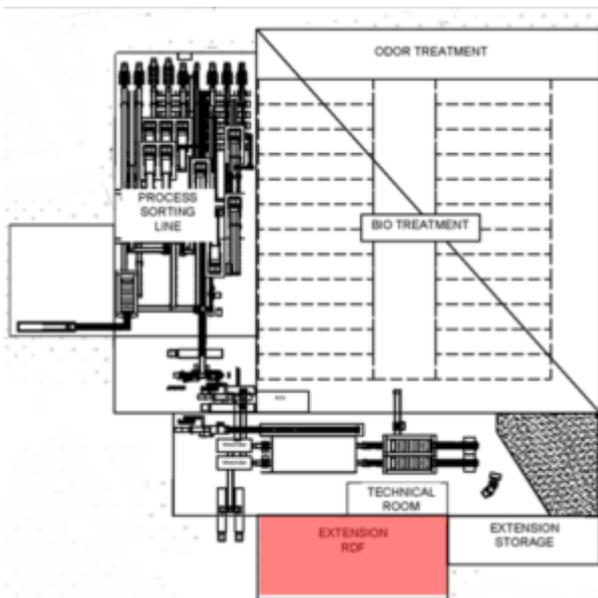

Sorting line

- Mechanical sorting of separately collected waste

- Separation of:
 - Cardboard
 - Paper
 - Plastics
 - PET
 - PP
 - PE
 - Tetrapaks

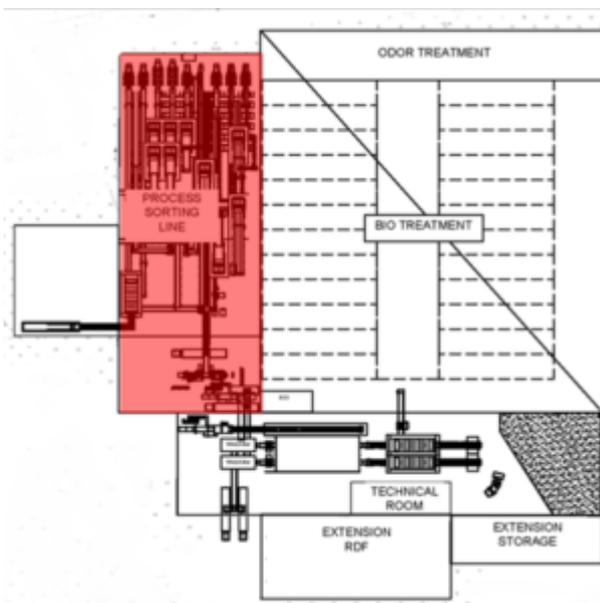

250 000 tons / year - mass balance:

MBT Plant

- 5% recyclables
- 10% compost
- 30% RDF
- 20% inert waste

Landfill

- 35% residual waste

€25 - 30 gate fee

Project manager



ЛКП
Зелене
Місто

LMC Zelene Misto
+38 032 297 55 70
zelene.misto@lvivcity.gov.ua
www.zelenemisto.info

